



**(43) International Publication Date**  
**5 January 2006 (05.01.2006)**

**(10) International Publication Number**  
**WO 2006/000767 A1**

**(51) International Patent Classification<sup>7</sup>: B60Q 9/00**

**(21) International Application Number: PCT/GB2005/002461**

**(74) Agent: HOLMES, Matthew, William;** Nissan Technical Centre Europe Ltd, Cranfield Technology Park, Bedfordshire MK43 0DB (GB).

**(22) International Filing Date:** 23 June 2005 (23.06.2005)

**(81) Designated States (unless otherwise indicated, for every kind of national protection available):** AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

**(25) Filing Language:** English

(26) Publication Language: English

**(30) Priority Data:**  
2004-188279                      25 June 2004 (25.06.2004)      JP

**(71) Applicant (for all designated States except US): NISSAN MOTOR CO., LTD [JP/JP]; 2, Takara-cho, Kanagawa-ku, Yokohama-shi, Kanagawa, 2210023 (JP).**

**(84) Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**(71) Applicant (for MG only):** NISSAN TECHNICAL CENTRE EUROPE LTD [GB/GB]; Cranfield Technology Park, Bedfordshire MK43 0DB (GB).


**(72) Inventor; and**

(75) **Inventor/Applicant (for US only):** EGUCHI, Takashi [JP/JP]; Nissan Jidosha KK, 2, Tama-cho, Kanagawa-ku, Yokohama City, Kanagawa Prefecture (JP).

**Published:**  
— *with international search report*

*[Continued on next page]*

**(54) Title: WARNING SYSTEM AND METHOD OF PROVIDING A WARNING**

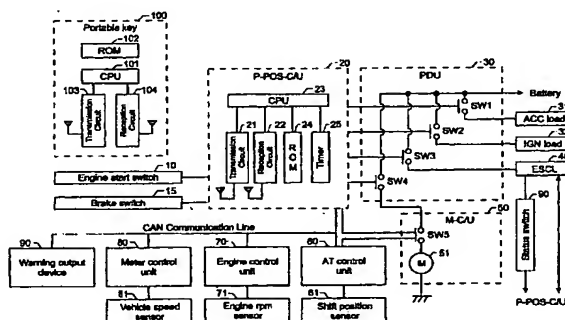

**(57) Abstract:** A warning system for providing a warning indication to a vehicle driver includes a power position detection means (20) for detecting a vehicle power position, gear shift position detection means (60, 61) for detecting a vehicle gear shift position, alighting detection means (20) for detecting the driver's preparations for alighting from the vehicle, and power position warning means (20) for outputting a power position warning indication. The device is operable to provide the power position warning indication when the power position detection means (20), the gear shift position detection means (60, 61) and the alighting detection means (20) detect that there are preparations for alighting, that the gear shift position is in a P (Park) range and that the power position is in a position other than showing IGNITION OFF. In another aspect, the invention provides a gear shift position warning means (20) for outputting a gear shift position warning indication of forgetting to return to a gear shift position in a P (Park) range when the engine is stopped, based on the results of detection by the power position detection means (20) and the gear shift position detection means (60, 61). The power position warning means (20) outputs a power position warning indication when the gear shift position detection means detects that the gear shift position has moved to the P (Park) range during output of the gear shift position warning indication.



---

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*